

<b>Channels</b>	R = ABZ / Q = AB / A = A
<b>Output</b>	HV = Driver (10mA Source / Sink) without inverted channels HVLD = Driver (10mA Source/Sink) with inverted channels PP = Driver (50mA Source/Sink) without inverted channels PPLD/HTL = Driver (50mA Source/Sink) with inverted channels OC = Open Collector without inverted channels TTL/RS422 = Driver (10mA Source/Sink) with inverted channels at 5vdc
<b>PPR</b>	see ppr option below
<b>Voltage</b>	V1 = 5 VDC / V2 = 10-28 VDC / V3 = 5-28 VDC
<b>Shaft Bore Size Ø d</b>	6 = 6mm / 6.35 = 6.35mm / 8 = 8mm / 10 = 10mm / 12 = 12mm / 14 = 14mm / X = Special
<b>Bore Style</b>	B = Blind Hollow Shaft / T = Through Hollow Shaft
<b>Mounting Options</b>	SF1 = Double Side Slotted Flexmount 46mm SF2 = Double Side Slotted Flexmount 63mm SF3 = Double Side Slotted Flexmount 66mm SF4 = Single Side Slotted Flexmount 27mm To 46mm SF5 = Single Side Slotted Flexmount 38mm To 79mm
<b>Clamping Style</b>	FS = Front Side RS = Rear Side
<b>Protection</b>	1 = IP50 / 2 = IP65 (For Blind Hollow Only)
<b>Temperature</b>	S = 0-70°C / H = 0-100°C
<b>Connection Location</b>	SG = Side Gland Only
<b>CE Certified</b>	N = Standard / CE = CE Certified



**J-260-ND-SL**

**Ordering Example – J-260-ND-SL-R-HVLD-1000-V2-6-B-SF2-FS-1-S-SG-N**


**Model J-260-ND-SL PPR Options**

1,2,3,4,5,6,8,9,10,12,14,15,16,18,20,22,24,25,26,28,30,31,32,33,34,36,38,40,42,45,46,48,50,54,55,60,64,72,76,80,82,84,86,88,90,92,94,95,96,98,100,106,108,110,112,114,120,122,125,128,130,136,144,146,148,150,156,157,160,164,170,171,172,176,180,200,210,240,250,256,276,300,305,360,480,500,512,597,600,720,750,800,840,960,1000,1024,1080,1200,1250,1270,1500,2000,2048,2500,3000,4096,5000,6000,7200,8192 & 10000


- Robust hollow shaft encoder
- Ideally suited for induction motor



**JENCODER J-260-ND-SL**

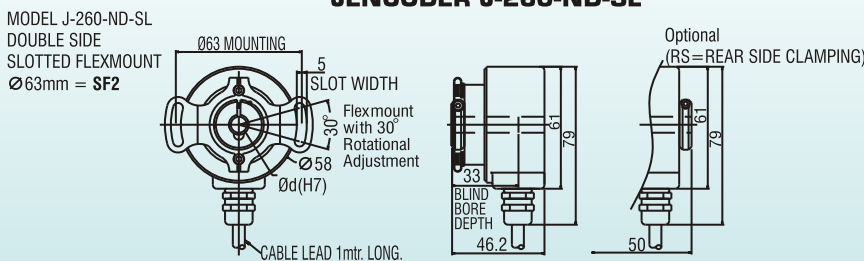

**MODEL J-260-ND-SL Slotted Flex Mounts**

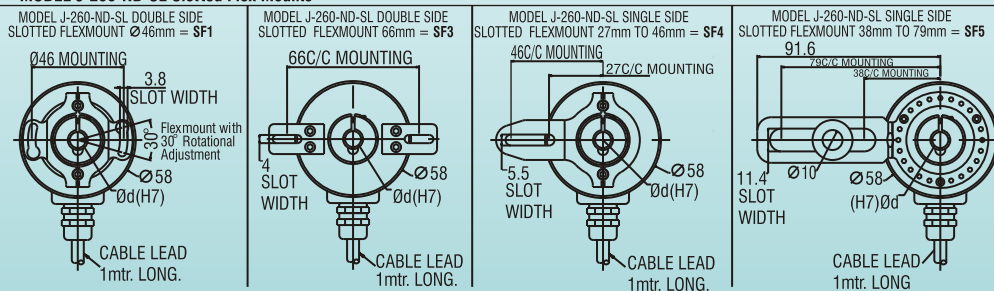

All dimensions are in mm with a tolerance of ±0.1 unless otherwise specified